

Thiele-Small Parameters

Qms	11.19	
Qes	1.07	
Qts	0.98	
Mms	18.63	g
Vas	6.16	l
Cms	0.24	mm/N
Xmax	4.15	mm
u0	0.23	%
Sd	134.78	cm ²
Bl	5.42	T*m
Rms	1.28	Kg/s

Electrical Characteristics

Nominal Impedance	4	Ohm ± 12%
Rated Power DIN 45573	120*	Watt
Rated Power DIN 45500	240	Watt
Resonance Frequency	75	Hz ± 6 Hz
Flux Density	10900	Gauss ± 7%
Voice Coil Resistance	3.4	Ohm ± 10%
Voice Coil Diameter	36	mm
Sensitivity (1w, 1m)	87.00	dB
Voice Coil Induc. (1KHz.)	0.416	mH




Measurement Conditions

Frequency Response: The Speaker is Mounted On a DIN 45575 Baffle.
 Microphone Distance: 1m.
 Measuring Power, Held Costantly, is 1 Watt Across a DC Resistance of Normal Imped.



LOUDSPEAKER

*= Power specifications: Nominal power mounted on a 10 liters closed box

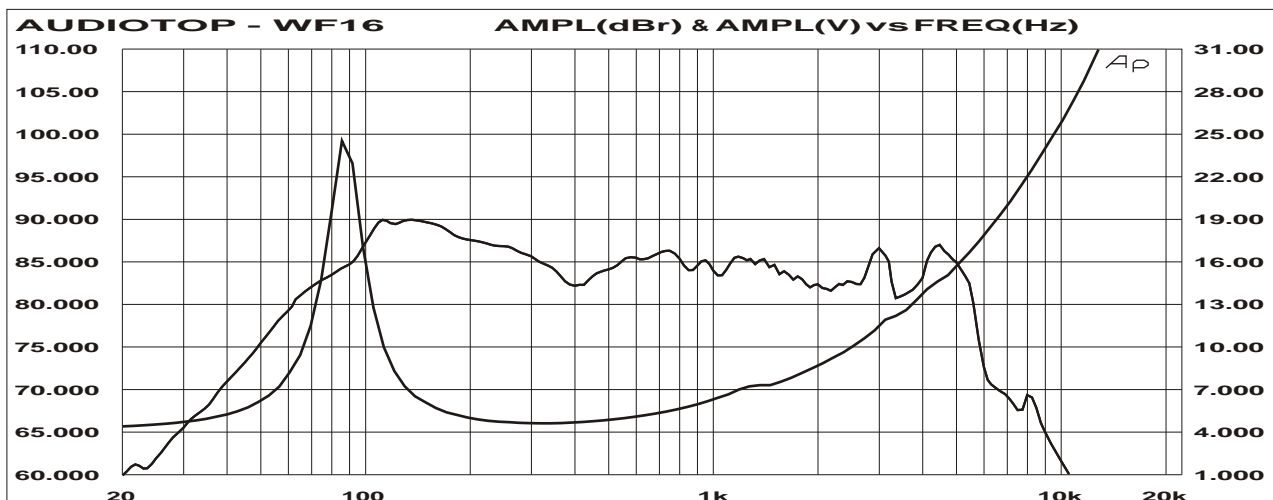

FREQUENCY RESPONSE AND IMPEDANCE :

NOTES: Black glass fiber cone, rubber surround and aluminium voice coil former

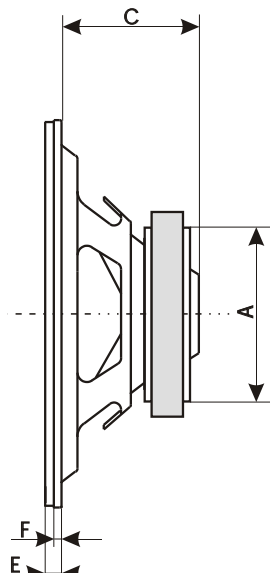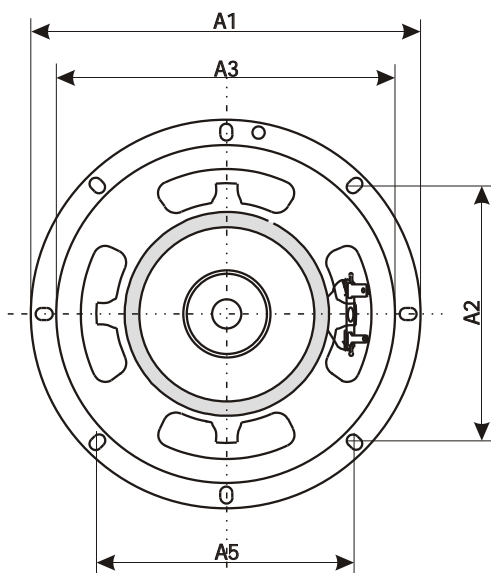

- A → 100 mm.
- A1 → 164 mm.
- A2 → 109 mm.
- A3 → 144 mm.
- A4 → --- mm.
- A5 → 109 mm.
- A6 → --- mm.
- B → --- mm.
- C → 67 mm.
- D → --- mm.
- E → 8,5 mm.
- F → 4,5 mm.
- G → --- mm.