
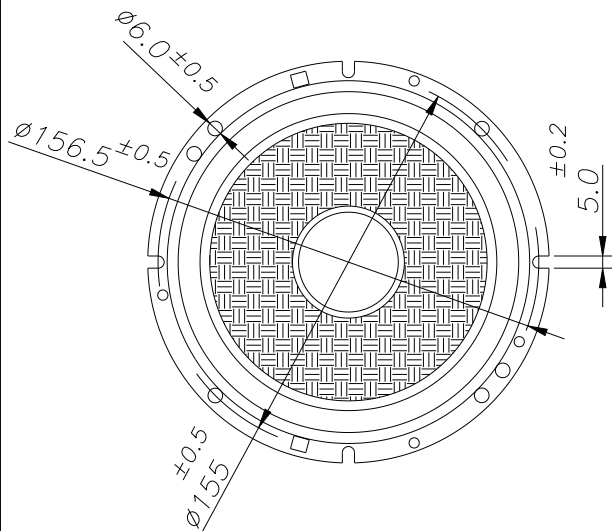
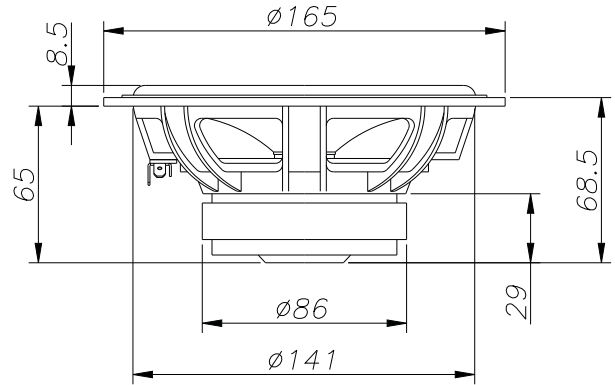


## MID-WOOFER

TPL 6

- 1 Surround RUBBER material
- 2 Gasket not present
- 3 Cone CARBON FIBER
- 4 Spider CONEX material
- 5 Dust Cap PP injected
- 6 Terminal 2,8x4,8mm
- 7 Voice coil 26x10,6 mm. 2 layers Kapton former
- 8 Magnet system vented 4,8 mm. gap height
- 9 Magnet 86x32x15mm.
- 10 Basket frame Nylon (injected) material




Frequency range	55-10000Hz
Equivalent volume, Vas	18L
Compliance, Cms	0,658mm/N
Mechanical resistance, Rms	0,68 Ns/m
Effektive diaphragm/cone area, Sd	132 cm <sup>2</sup>
Voice coil diameter	26 mm
Voice coil height	10,6mm
Air gap height	4,8 mm
Linear excursion, Xmax	± 3 mm
Max mechanical excursion	± 6 mm
Nominal impedance	4 ohm
Voice coil resistance	3,3 ohm
Voice coil inductance	0,48 mH
Free air resonance, Fs	65 Hz
Sensitivity, Spl (2.83V/1m)	90 dB
Force factor, Bxl	4,1Tm
Moving mass, Md	9,6 g
Qms	5,48
Qes	0,65
Qts	0,58
Nominal power	110W
Short term max power	220W
Magnet weight	373g
Total weight of driver	980 g



# MID-WOOFER

TPL 6

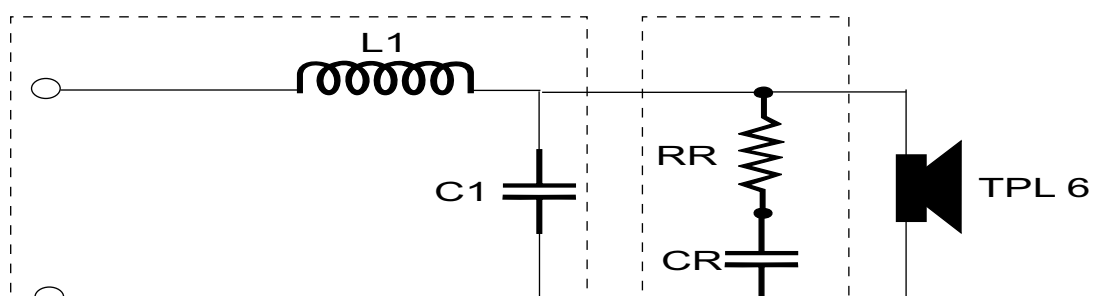

### Passa basso

Ft	L1	C1	Ft	L1	C1
350	2,20	100	1500	0,50	22
500	1,50	68	2000	0,38	18
600	1,20	56	2500	0,30	15
700	1,00	47	3000	0,25	10
1000	0,70	33	4000	0,20	8,2

### Rifasatore

RR= 3,3  
CR= 33

### Legenda

Ft frequenza [Hz]

L induttanza [mH]

C capacità [uF]

R resistenza 11W [ohm]



**E.B. ACOUSTIC & ELECTRONIC RESEARCH S.R.L.**

Via S. Bartolomeo, 10 - 28047 OLEGGIO (NO) Italy Ph. 0039 0321 91430 - Fax 0039 0321 94411

[www.ebacoustic.it](http://www.ebacoustic.it)