

# 2708 SVC - 4 Ohm

## CONNECTIONS



## SUGGESTED AMPLIFIERS


**Stealth 2  
HC 150.2**

### Closed Enclosure




Number of woofers	4 x 2708 SVC
Connection	Series - Parallel
Nominal Impedance	4 Ohm
Enclosure volume	45 L
Phono-absorbition	2 Layers - 2 cm thickness
Wood thickness	Medium density 2 cm thickness
Construction	As showed above

### Vented Enclosure

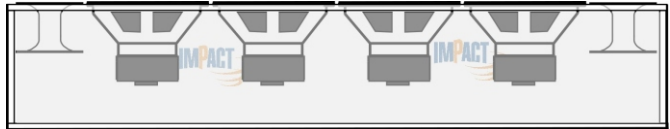

Number of woofers	4 x 2708 SVC
Connection	Series - Parallel
Nominal Impedance	4 Ohm
Enclosure volume	70 L
Phono-absorbition	1 Layer - 2 cm thickness
Wood thickness	Medium density 2 cm thickness
Construction	As showed above
Vents	1 pcs - Dual trumpet - Lenght 108 mm - Diam. 69 mm

### Bandpass Enclosure

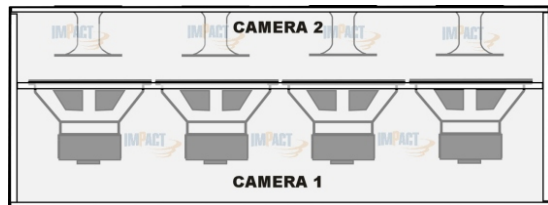

Number of woofers	4 x 2708 SVC
Connection	Series - Parallel
Nominal Impedance	4 Ohm
Enclosure volume	Chamber 1: 44 L - Chamber 2: 35 L
Phono-absorbition	1 Layer - 2 cm thickness each chamber
Wood thickness	Medium density 2 cm thickness
Construction	As showed above
Vents	3 pcs - Dual trumpet - Lenght 169 mm - Diam. 69 mm